

## (12) UK Patent Application (19) GB (11) 2 281 470 (13) A

(43) Date of A Publication 01.03.1995

(21) Application No 9307008.4

(22) Date of Filing 02.04.1993

(71) Applicant(s)  
Motorola Limited


(Incorporated in the United Kingdom)

Jays Close, Viabes Ind Est, BASINGSTOKE,  
Hampshire, RG22 4PD, United Kingdom(72) Inventor(s)  
William Neil Robinson(74) Agent and/or Address for Service  
Hugh Christopher Dunlop  
Motorola Limited, European Intellectual Property  
Operation, Jays Close, Viabes Industrial Estate,  
BASINGSTOKE, Hampshire, RG22 4PD,  
United Kingdom(51) INT CL<sup>5</sup>  
H04Q 7/04(52) UK CL (Edition L)  
H4K KY4D14(56) Documents Cited  
GB 2217955 A(58) Field of Search  
UK CL (Edition L) H4K KY4D KY4D10T KY4D14 KY4T  
INT CL<sup>5</sup> H04Q

(54) Multichannel random access communications systems

(57) A communications system comprising a central unit and a number of remote units and a downlink 10 for communication from the central unit to the remote units and an uplink 11 for communication from the remote units to the central unit. A signalling channel is provided on the downlink, a plurality of traffic channels are provided on the uplink and signalling information is transmitted on the downlink signalling channel to indicate positively which of one or more of the uplink traffic channels is to be used as a signalling channel for a random access request.


FIG.1

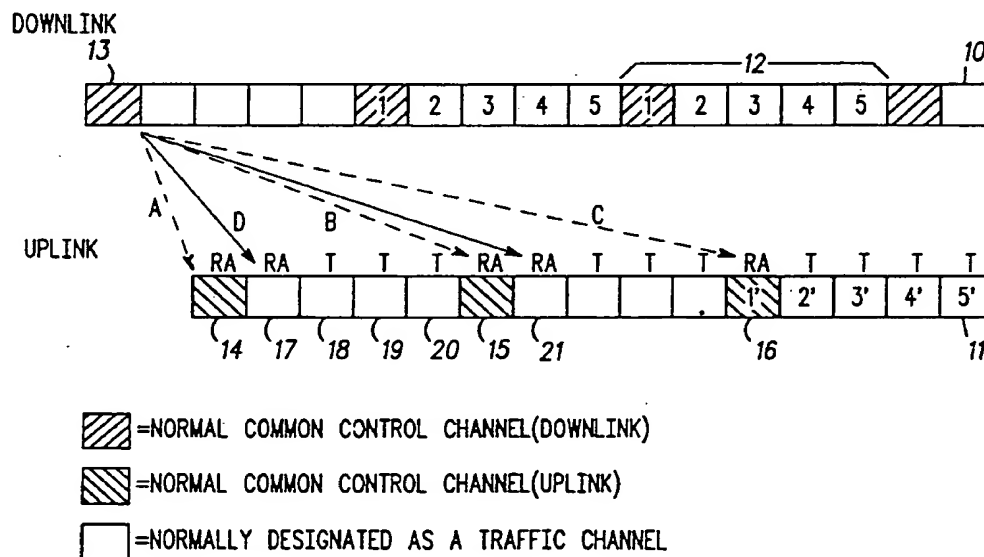

GB 2 281 470 A

**FIG. 1**

1/2

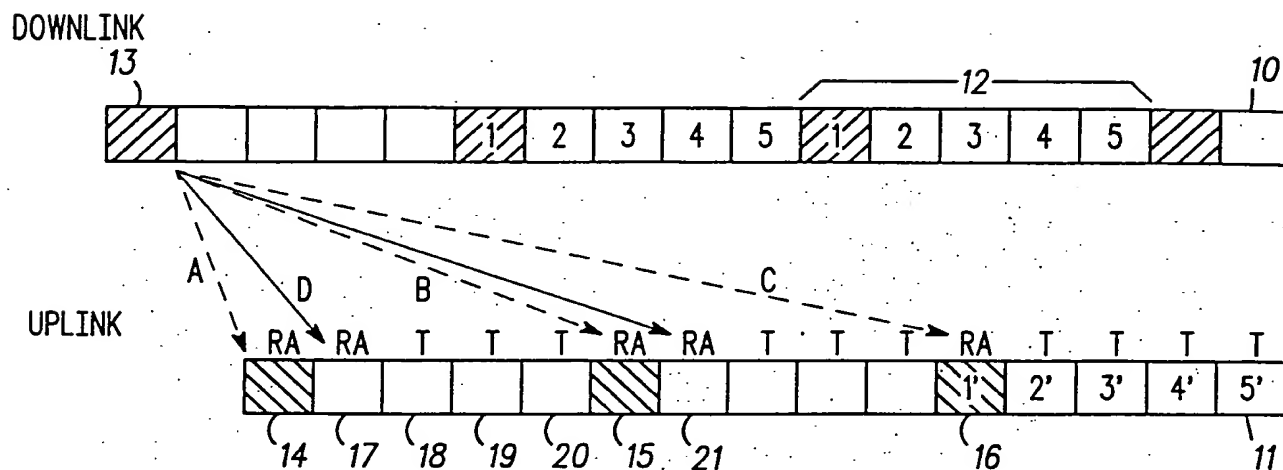

- =NORMAL COMMON CONTROL CHANNEL(DOWNLINK)
- =NORMAL COMMON CONTROL CHANNEL(UPLINK)
- =NORMALLY DESIGNATED AS A TRAFFIC CHANNEL

**FIG. 2**



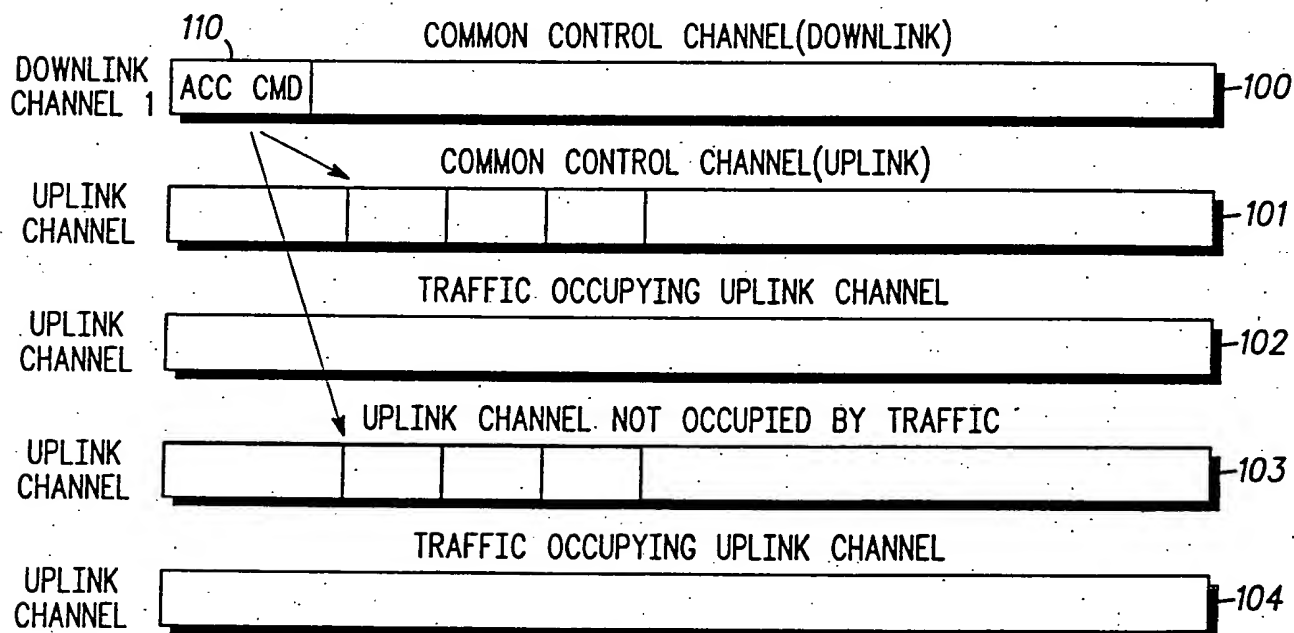


FIG. 3

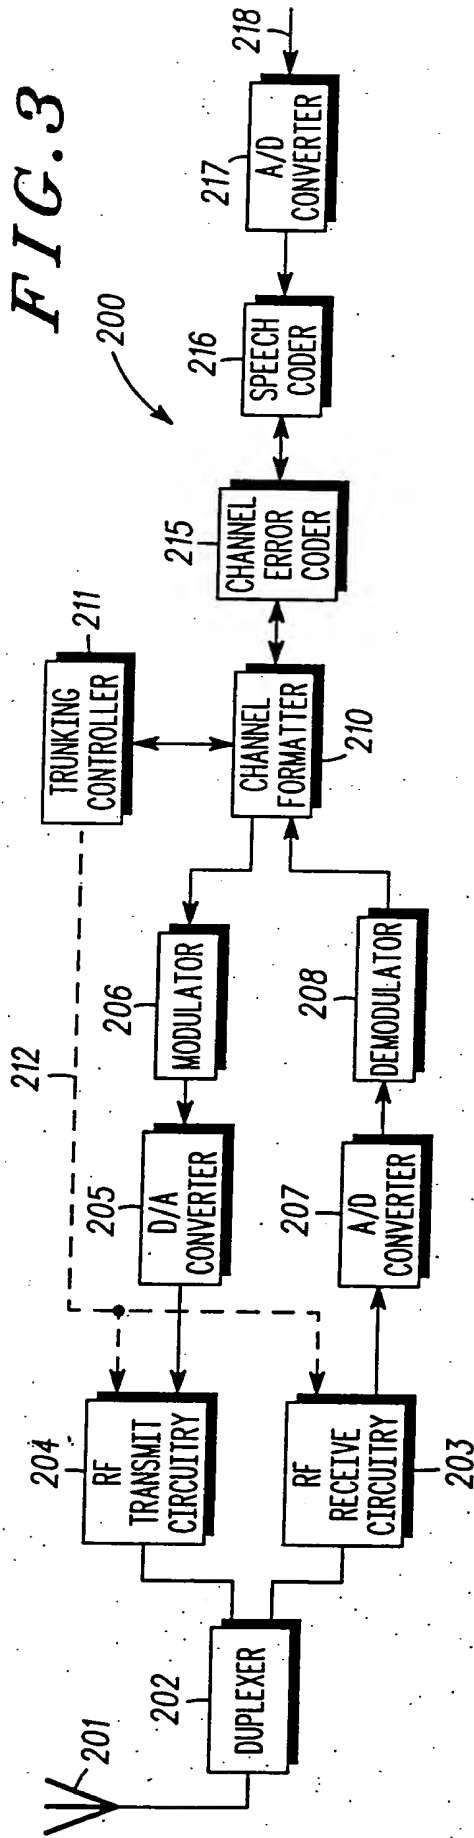

2/2

FIG. 4

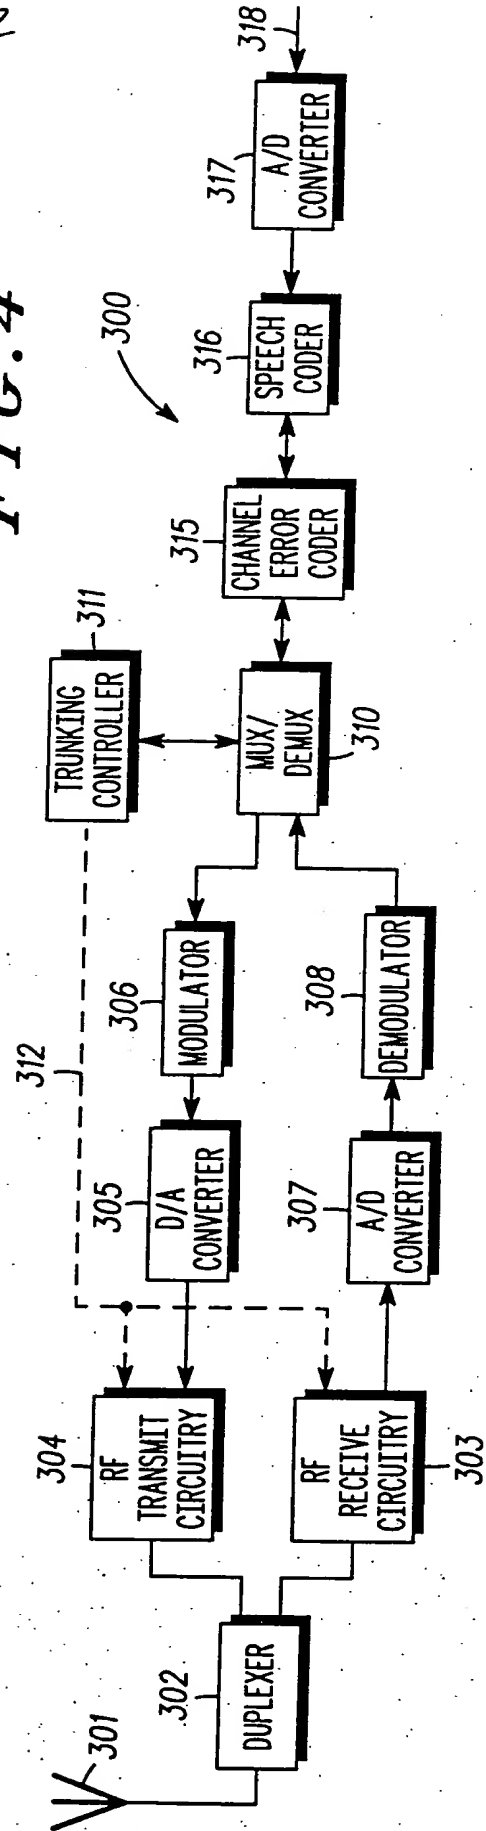

MULTICHANNEL RANDOM ACCESS COMMUNICATIONS SYSTEMField of the Invention

5           This invention relates to a communications system comprising a central unit and a number of remote units and multiple traffic channels and an arrangement for providing random access to the channels. Separately and in addition the invention relates to a central unit and a remote unit of  
10 such a system.

Background to the Invention

15           In trunked radio systems, subscriber radios often gain access to the uplink radio air interface by sending a random access message to the infrastructure. The protocol of the trunked radio system normally includes a common uplink random access channel, which is made available to subscriber radios in a known location in the frequency-division-multiple-access  
20 (FDMA) or time-division-multiple-access (TDMA) channel domain.

          One of the problems with common random access channels is that as the number of accesses per unit time increases, the likelihood of random access message collision increases.  
25           When two or more random access messages collide, it is not possible for the infrastructure receiving the colliding random access messages to correctly capture and decode more than one of the messages, and often, depending on the radio capture effect, none of the colliding messages can be  
30 captured and decoded. A random access attempt which is not successfully captured and de-coded is considered to have failed. The probability of random access message failure increases with the random access load.

          Failed random access message may be re-tried at a later  
35 opportunity, so causing an added delay between the time when the user attempts to access a service and the time the infrastructure receives the request correctly. Re-tries also increase the load on the random access channel, therefore exacerbating the collision problem.

A known technique for reducing the probability of collision is dynamic frame based slotted aloha random access. In this arrangement, an access command is transmitted by a central unit on the downlink indicating that the common control channel on the uplink in the next N slots (e.g. 3 or 4 slots) is available for random access. Units wishing to contend for access receive this access command and randomly choose one of the N uplink common control channel slots for transmitting their access requests. This arrangement has the result that access requests are spread over N frames and are therefore less likely to collide. Another access command is not transmitted on the downlink until N slots have passed. The probability of collision on an uplink common control channel slot is reduced, but this is at the expense of delay, because some units will wait for several slots before transmitting their requests.

Because of the probability of collision, a heavily loaded random access channel achieves an efficiency of approximately 30 - 40% only, subject to the capture effect and the rules of the random access protocol.

There is a need for an improved random access communications system.

Air interface protocols are generally balanced in that the amount of uplink information is broadly speaking balanced by the amount of downlink information. Also the maximum capacity of the uplink is normally fairly well balanced by the capacity of the maximum downlink capacity.

Because the uplink random access channel is only operating at 30% to 40% efficiency, 60% to 70% of the channel capacity remains un-usable. Because of the balance between the maximum capacities of the uplink and downlink, and the balance of the uplink and downlink protocol, there is over capacity on the downlink. Necessary system broadcast messages usually consume some of this extra downlink capacity, but the downlink still has spare capacity, which could be used if a technique could be developed which would enable the system to accept more random accesses per unit time.

In some multisite trunked radio systems, a large proportion of the random accesses are due to registration requests, as opposed to voice or data call set-up requests. During the busiest periods, the random accesses due to registration attempts can interface with the call set-up times for the voice or data traffic. If more random accesses could be accommodated per unit time, the average call set-up times would be reduced. In a scenario where the voice calls are semi-duplex and may involve a line connected terminal as one of the users or may use multiple cells, in some cells, the downlink traffic may be occupied by the traffic, but the paired uplink channel may not be in use for traffic.

#### Summary of the Invention

According to the present invention, a communications system is provided comprising a central unit and a number of remote units and a downlink for communication from the central unit to the remote units and an uplink for communication from the remote units to the central unit wherein a signalling channel is provided on the downlink, a plurality of traffic channels are provided on the uplink and means are provided for transmitting signalling information on the downlink signalling channel to indicate positively which of one or more of the uplink traffic channels is to be used as a signalling channel for a random access request.

Where the system is a TDMA system, it is preferred that the one or more of the uplink traffic channels reside on slots which are separated in time from the downlink signalling slot by a transmit-receive switching delay.

In the case of a TDMA system, a preferred feature is that the central unit organises the allocation of traffic slots on the uplink so as to reserve, where possible, the optimum traffic channels for use as signalling channels.

A preferred embodiment of the invention will now be described, by way of example, with reference to the drawings.

#### Brief Description of the Drawings

Fig. 1 shows a timeslot arrangement of downlink and uplink channels of a TDMA communications system in accordance with the invention.

Fig. 2 shows control channels and traffic channels of an FDMA system in accordance with the invention.

Fig. 3 shows a block diagram of a central unit in accordance with the invention and

Fig. 4 shows a block diagram of a remote unit in accordance with the invention.

10

#### Detailed Description of the preferred embodiments

Referring to Fig. 1, the example will be described of a TDMA system incorporating the invention and in the figure, are shown a downlink (central-to-remote) and an uplink (remote-to-central) of such a system. The downlink 10 and uplink 11 are on different frequencies, there are several further links, particularly several further uplinks on further frequencies not shown.

20 The downlink 10 is divided into frames 12 of five slots per frame. These are labelled 1 - 5. The first slot 13 of a frame is a common control channel. The common control channel timeslots are illustrated by shading. It will, of course, be understood that the carrier could be divided into  
25 six or indeed a large number of channels.

The uplink 11 is also divided into frames of five slots per frame. The first slot 14, 15, 16 of a frame is again a common control channel and is again illustrated by shading. All the other slots on the uplink and the downlink are  
30 normally considered to be traffic channels.

It may be noted that the control channel timeslots on the uplink are offset vis-a-vis those on the downlink. The uplink control channel timeslots occur two slots after the downlink control channel timeslots, so that a command can be  
35 sent from the central to the remote and the remote can respond quickly with signalling in the next immediately following uplink control channel slot. Furthermore, sufficient time is provide for the remote unit to switch from

receiving on the downlink frequency to transmitting on the uplink frequency between these control channel timeslots.

In the figure, the arrow A illustrates the switching of a remote unit from receiving an access command in downlink control channel slot 13 to transmitting a random access request RA in uplink control channel timeslot 14.

As has been explained, in dynamic frame bases slotted aloha random access, a random access command is transmitted in slot 13 informing the remote units that slots 14, 15 and 16 can all be used for a random access request. These are illustrated by dashed arrows A, B and C.

In accordance with this embodiment of the invention, a new access command is transmitted on the downlink controlled channel timeslot 13 informing remote units that not only can control channel slot 14 be used for random access but also that a traffic channel timeslot 17 can be used. This is illustrated by arrow D. Thus, on sending this new command, slots 14 and 17 become available for random access whilst slots 18, 19 and 20 remain as traffic slots.

It is to be noted for semi-duplex equipment, that slot 17 is the preferred slot for an additional random access slot, because arrow D provides adequate time for switching from receiving on the downlink to transmitting on the uplink and there is also adequate time to switch back to receiving on the downlink to receive the next immediately following control channel timeslot on the downlink. By contrast, slots 18 and 20 are less preferred as they provide insufficient time for switching to and from the next immediately following downlink control channel timeslot, while slot 19 is particularly unsuitable, because it coincides with a downlink control channel timeslot.

Traffic slots on another frequency carrier (not shown) can be allocated as signalling slots.

In this manner, the unused uplink capacity resulting from the unused uplink traffic channel represented by slot 17 is dynamically reconfigured as a temporary additional common access random channel and can be used to increase the capacity of the common random access channel and therefore increase numbers of random accesses per unit time that can be



successfully received. Moreover, no additional delay is introduced, because the remote unit can transmit its random access request and immediately switch back to receive the next immediately following downlink control channel slot in order to receive a control channel grant command if the random access has been successful.

While not essential to the invention, the idea of the invention can be combined with features of dynamic frame based slotted aloha random access by further providing information in the access command transmitted in downlink control channel slot 13 indicating that not only can traffic slot 17 be used for random access but also traffic slot 21 in the next immediately following frame. This arrangement provides some of the benefit of dynamic frame based slotted aloha random access with some of the benefit of the present invention. Over the two frames in question, four slots have been made available for random access requests, thereby spreading potential contending units over four different slots. Clearly those users that randomly select slots 15 and 21 for access requests have a single-frame delay introduced in their access. Nevertheless, this is an improvement on two or three frames delay.

Referring now to Fig. 2, a further embodiment of the invention is explained in the context of an FDMA system, such as MPT1327. In the figure, a downlink common control channel 100 is shown, together with a uplink common control channel 101, an uplink traffic channel 102 occupied by traffic, an uplink traffic channel 103 not occupied by traffic and an uplink traffic channel 104 occupied by traffic. The system is fairly heavily loaded, as channels 102 and 104 are both occupied.

In the downlink common control channel 100 there is transmitted from time to time an access command 110. This command includes information instructing remote units that, in addition to normal common control channel 101, traffic channel 103 can be used for random access request (i.e. signalling). This is illustrated by arrows E and F. Any units wishing to transmit receive access command 110 and receive the information that they are free to use either of

channels 101 and 103 for random access requests and randomly select one of these channels, switching to the particular frequency selected and transmitting a request for a channel grant. The central unit receives the request for channel grant and, if there is no collision, it responds with a channel grant command in downlink channel 100.

In both arrangements of Fig. 1 and Fig. 2, various known procedures can be used in the event of a collision. Thus, if a remote unit recognises that it has not received a channel grant command in response to a request, it assumes that this is due to a collision and, for example, introduces a random delay before making a new request. In this manner, different colliding units have the opportunity of selecting different delays and avoiding collision on a second attempt. Other known schemes for recovering from collision can be used.

Referring now to Fig. 3, a central unit (base station) 200 of a trunked radio system is shown comprising an antenna 201, a duplexer 202, RF receive circuitry 203 and RF transmit circuitry 204. Connected to the transmit circuitry 204 is a D-A converter 205 and a modulator 206. Connected to the RF circuitry 203 is an A-D converter 207 and a demodulator 208. The demodulator 208 and modulator 206 are connected to a channel formatter 210, which is in turn connected to a trunking controller 211. Also connected to the channel formatter 210 is a channel error coder 215, in turn connected to a speech coder 216 and an A/D converter 217. The antenna 201 communicates with a mobile or remote unit which is illustrated in Fig. 4 and described below. In use, analog speech can be input from a dispatcher or a telephone line via A/D converter 217, encoded in speech coder 216 and output on a traffic channel by means of channel formatter 210 and RF transmit circuitry 204. Similarly, speech traffic is received in a traffic channel through receive circuitry 203 and passed via channel formatter 210 to speech coder 216 for outputting through a loudspeaker or to a telephone line. Other connections can, of course, be set up such as mobile-to-mobile communication via channel formatter 210 not involving speech coder 216.

Trunking controller 211 controls the allocation of traffic channels (e.g. timeslots) to different users using the system. In relatively heavily loaded conditions, trunking controller 211 transmits access commands by  
5 outputting these to the channel formatter 210 for transmission in the downlink common control channel slots. These access commands are broadcast commands i.e. not addressed to specific units, and include one or more traffic channel indicators indicating which traffic channels may be  
10 used for signalling. If a signal is received on a traffic channel that has been designated as a signalling channel, channel formatter 210 routes this signal to trunking controller 211 instead of routing it to channel error coder 215 (or to any other traffic destination).

15 A preferred feature performed by trunking controller 211 is as follows. When allocating channels to remote units, trunking controller 211 selects the second, third and fourth channels (i.e. those channels represented by timeslots 18, 19 and 20) for allocation in preference to allocating the first  
20 channel carried by the first timeslot immediately following the uplink common control channel (i.e. that represented by timeslot 17). In this manner, timeslot 17 is, to some degree, reserved for use as signalling if necessary. Of course, the trunking controller 211 does not deny access if  
25 timeslot 17 is required for use. On the other hand, trunking controller 211 can be selective in when it allocates timeslot 17 for traffic. Thus, in the event that a remote unit requests grant for a data call (the nature of the call being indicated in the request for access) trunking controller 211  
30 can decide to delay this data call until one of the other channels becomes available. This is because a data call is likely to have a longer duration and "tie up" the first channel for a long time. In addition, or alternatively, trunking controller 211 can cause a handover of a call from  
35 the first channel to one of the other channels when one of those channels becomes available, thus freeing up timeslot 17.

Referring to Fig. 4, a mobile radio is shown having elements 301 - 308 which are broadly similar to elements 201

- 208 of the central unit (except that the transmitter circuitry 304 has lower power) and which has elements 315 - 317 similar to elements 215 - 217 of the central unit.

5 Connected to the modulator 306, demodulator 308 and channel error coder 315 is a multiplexer/demultiplexer 310, which in turn is connected to a controller 311.

Multiplexer/demultiplexer 310 sorts received signals into control signals, which it directs to the controller 311 and traffic signals intended for the remote in question, which it  
10 routes to the channel error coder 315.

Multiplexer/demultiplexer 310 also receives signalling from controller 311, which it transmits on an appropriate timeslot via transmit circuitry 304.

15 When an access command is received from a central unit via receive circuitry 303, this is routed by multiplexer/demultiplexer 310 to controller 311 because it is received in a common control channel timeslot. If this signalling contains an access command indicating that a further timeslot on the uplink can be used for signalling,  
20 the operation is as follows. On pressing the push-to-talk (not shown), controller 311 selects either the normal common control channel timeslot or the newly assigned traffic timeslot for a random access request and sends the request to the multiplexer/demultiplexer 310, with an indication as to  
25 which timeslot it is to be transmitted on.

Multiplexer/demultiplexer 310 causes the access request to be transmitted via transmit circuitry 304 on the appropriate timeslot.

30 Multiplexer/demultiplexer 310 routes the next immediately following control channel timeslot from the downlink which is received in receive circuitry 303 to controller 311. If controller 311 identifies a "go to channel" command from this signalling, it instructs multiplexer/demultiplexer 310 to commence routing speech or  
35 other signals from channel error coder 315 to transmitter 304 on the appropriate channel. If no "go to channel" command is received, controller 311 attempts a retry in a manner known in the art.

The location of the temporary additional common random access channel is signalled on the downlink using the spare downlink common control capacity which is normally available with most relatively balanced protocols such as MPT1327.

- 5       The temporary additional common random access channel can be included in the frame of any frame based slotted aloha mechanism.

- 10       This technique can be used to increase the maximum number of random accesses per unit time that can be correctly received by the infrastructure, so that the capacity of the uplink common random access channel is no longer the limiting factor of the common control channel capacity.

- 15       This technique exploits unused uplink capacity that may be available. In the TDMA domain, there will probably be some TDMA slots which cannot be exploited by semi-duplex equipment for the temporary additional common random access channel because of the switching time needed between the transmit slot and the receive slot.

Claims

1. A communications system comprising a central unit and a number of remote units and a downlink for communication from the central unit to the remote units and an uplink for communication from the remote units to the central unit wherein a signalling channel is provided on the downlink, a plurality of traffic channels are provided on the uplink and means are provided for transmitting signalling information on the downlink signalling channel to indicate positively which of one or more of the uplink traffic channels is to be used as a signalling channel for a random access request.

2. A system according to claim 1 wherein the uplink and downlink are time divided in a TDMA protocol to provide uplink signalling and traffic slots and downlink signalling and traffic slots

3. A system according to claim 2, wherein the signalling information is transmitted on a downlink signalling slot and one or more of the uplink traffic channels reside on slots which are separated in time from the downlink signalling slot by a time interval which is sufficient for a remote unit to switch from receive to transmit.

4. A system according to claim 2 or 3 wherein control means are provided at the central unit arranged to allocate traffic slots on the uplink so as to optimise the availability of preferred traffic slots for signalling purposes.

5. A remote unit of a communications system comprising a central unit and a number of remote units and a downlink for communication from the central unit to the remote units and an uplink for communication from the remote units to the central unit, wherein a signalling channel is provided on the downlink, a signalling channel is provided on the uplink and a plurality of traffic channels are provided on the uplink and wherein the remote unit comprises:

means for receiving signalling information on the downlink and

means for selectively transmitting a channel access request in one of a signalling channel and a traffic channel on the uplink, depending on the signalling received.

6. A central unit of a communications system comprising a central unit and a number of remote units and a downlink for communication from the central unit to the remote units and an uplink for communication from the remote units to the central unit, wherein a signalling channel is provided on the downlink, a signalling channel is provided on the uplink and a plurality of traffic channels are provided on the uplink and wherein the central unit comprises:

means for transmitting signalling information on the downlink indicating that a traffic channel on the uplink is to be used for signalling and for receiving a channel access request in a traffic channel on the uplink and transmitting a channel grant command on the downlink in response thereto.

Patents Act 1977  
Examiner's report to the Comptroller under  
Section 17 (The Search Report)

Application number

GB 9307008.4

Relevant Technical fields

(i) UK CI (Edition L ) H4K: HY4D; KY4D10T; KY4D14;  
KY4T

(ii) Int CI (Edition 5 ) H04Q

Databases (see over)

(i) UK Patent Office

(ii)

Search Examiner

AL STRAYTON

Date of Search

12 MAY 1993

Documents considered relevant following a search in respect of claims ALL

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
X	GB 2217955 A - page 10, line 11 - page 12 line 11	ALL



Category	Identity of document and relevant passages	Relevant to claim(s) <span style="float: right;">14</span>

### Categories of documents

**X:** Document indicating lack of novelty or of inventive step.

**Y:** Document indicating lack of inventive step if combined with one or more other documents of the same category.

**A:** Document indicating technological background and/or state of the art.

**P:** Document published on or after the declared priority date but before the filing date of the present application.

**E:** Patent document published on or after, but with priority date earlier than, the filing date of the present application.

**&:** Member of the same patent family, corresponding document.

**Databases:** The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).